


INFORMATION IN THIS DRAWING PROVIDED FOR REFERENCE ONLY

| REVISIONS | | | | |
|-----------|------|-------------|------|----------|
| ZONE | REV. | DESCRIPTION | DATE | APPROVED |
| | | | | |

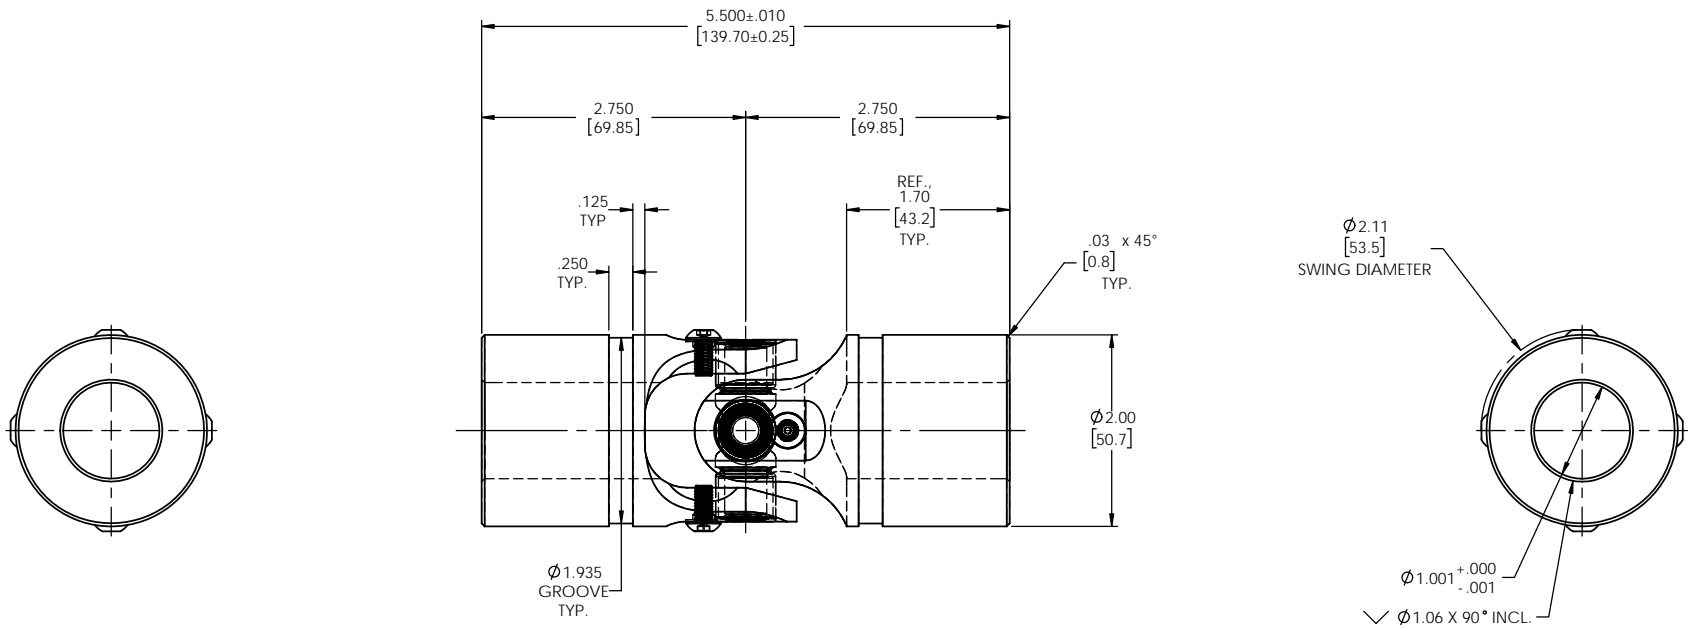

TYPICAL BOTH ENDS

NOTE(S), UNLESS OTHERWISE SPECIFIED.

- (1) UNIVERSAL JOINT IS MARKED w/ "BELDEN" LOGO, PART NUMBER / DRAWING NUMBER, REVISION LEVEL (IF ANY), DATE OF MANUFACTURE (MO/YR), AND BELDEN JOB NUMBER.
- (2) UNIVERSAL JOINT IS LUBRICATED w/ TRIBOLUBE 12, NLGI GRADE 2, MULTI-PURPOSE SYNTHETIC GREASE.
- (3) UNIVERSAL JOINT IS CAPABLE OF OPERATING AT ANY ANGLE UP TO AND INCLUDING 45°, 90° FOR THE DOUBLE UNIVERSAL JOINT.
- (4) UNIVERSAL JOINT HAS STANDARD GROOVES TO ACCEPT INSTALLATION OF PROTECTIVE COVERS (BOOTS). BOOTS AVAILABLE SEPARATELY. REFER TO BELDEN CATALOG, WEBSITE, OR CONTACT BELDEN SALES.
- (5) REFER TO BELDEN CATALOG, WEBSITE, OR CONTACT BELDEN SALES FOR TORQUE CAPACITY.
- (6) THIS DRAWING REPRESENTS A STANDARD BELDEN ITEM. CUSTOM UNIVERSAL JOINTS ARE AVAILABLE UPON REQUEST. PLEASE CONTACT BELDEN SALES.

BELDEN PART NUMBER: UJ-NB2000x1000

DO NOT SCALE DRAWING

| | | | | | |
|---|---|---|--|---|---|
| UNLESS OTHERWISE SPECIFIED CHAMFER ALL HOLES BREAK ALL SHARP CORNERS DE-BURR ALL FEATURES TURNED SURFACES: \checkmark 60° MILLED SURFACES: \checkmark 125° PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BELDEN INCORPORATED. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BELDEN INCORPORATED IS PROHIBITED. | STANDARD TOLERANCES, UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES (mm) ANGULAR MACHINED: ±1.0° FRACTIONAL: ±.015" TWO PLACE DECIMAL: ±.010" THREE PLACE DECIMAL: ±.005" FOUR PLACE DECIMAL: ±.0005" CONCENTRICITY: .0005" T.I.R. ALL HOLES TO BE LOCATED ON CENTERLINE (C) WITHIN .005" T.I.R. INTERPRET GEOMETRIC TOLERANCES I.A.W. ANSI Y14.5M-1992 | MATERIAL: ALLOY STEEL HEAT TREAT: NONE FINISH: NONE | DRAWN: JP 11APR13 CHECKED: RNK 11APR13 ENG APPR: RNK 11APR13 MFG APPR: [] D/A: [] COMMENTS: | Belden Incorporated www.beldenuniversal.com TITLE: ASSEMBLY, NEEDLE BEARING UNIVERSAL JOINT SIZE: C DWG. NO.: UJ-NB2000x1000 SCALE: 1:1 WT (Lbs): 2.97 SHEET 1 OF 2 | |
| | UNLESS OTHERWISE SPECIFIED CHAMFER ALL HOLES BREAK ALL SHARP CORNERS DE-BURR ALL FEATURES TURNED SURFACES: \checkmark 60° MILLED SURFACES: \checkmark 125° | STANDARD TOLERANCES, UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES (mm) ANGULAR MACHINED: ±1.0° FRACTIONAL: ±.015" TWO PLACE DECIMAL: ±.010" THREE PLACE DECIMAL: ±.005" FOUR PLACE DECIMAL: ±.0005" CONCENTRICITY: .0005" T.I.R. ALL HOLES TO BE LOCATED ON CENTERLINE (C) WITHIN .005" T.I.R. INTERPRET GEOMETRIC TOLERANCES I.A.W. ANSI Y14.5M-1992 | MATERIAL: ALLOY STEEL HEAT TREAT: NONE FINISH: NONE | DRAWN: JP 11APR13 CHECKED: RNK 11APR13 ENG APPR: RNK 11APR13 MFG APPR: [] D/A: [] COMMENTS: | Belden Incorporated www.beldenuniversal.com TITLE: ASSEMBLY, NEEDLE BEARING UNIVERSAL JOINT SIZE: C DWG. NO.: UJ-NB2000x1000 SCALE: 1:1 WT (Lbs): 2.97 SHEET 1 OF 2 |
| | UNLESS OTHERWISE SPECIFIED CHAMFER ALL HOLES BREAK ALL SHARP CORNERS DE-BURR ALL FEATURES TURNED SURFACES: \checkmark 60° MILLED SURFACES: \checkmark 125° | STANDARD TOLERANCES, UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES (mm) ANGULAR MACHINED: ±1.0° FRACTIONAL: ±.015" TWO PLACE DECIMAL: ±.010" THREE PLACE DECIMAL: ±.005" FOUR PLACE DECIMAL: ±.0005" CONCENTRICITY: .0005" T.I.R. ALL HOLES TO BE LOCATED ON CENTERLINE (C) WITHIN .005" T.I.R. INTERPRET GEOMETRIC TOLERANCES I.A.W. ANSI Y14.5M-1992 | MATERIAL: ALLOY STEEL HEAT TREAT: NONE FINISH: NONE | DRAWN: JP 11APR13 CHECKED: RNK 11APR13 ENG APPR: RNK 11APR13 MFG APPR: [] D/A: [] COMMENTS: | Belden Incorporated www.beldenuniversal.com TITLE: ASSEMBLY, NEEDLE BEARING UNIVERSAL JOINT SIZE: C DWG. NO.: UJ-NB2000x1000 SCALE: 1:1 WT (Lbs): 2.97 SHEET 1 OF 2 |
| | UNLESS OTHERWISE SPECIFIED CHAMFER ALL HOLES BREAK ALL SHARP CORNERS DE-BURR ALL FEATURES TURNED SURFACES: \checkmark 60° MILLED SURFACES: \checkmark 125° | STANDARD TOLERANCES, UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES (mm) ANGULAR MACHINED: ±1.0° FRACTIONAL: ±.015" TWO PLACE DECIMAL: ±.010" THREE PLACE DECIMAL: ±.005" FOUR PLACE DECIMAL: ±.0005" CONCENTRICITY: .0005" T.I.R. ALL HOLES TO BE LOCATED ON CENTERLINE (C) WITHIN .005" T.I.R. INTERPRET GEOMETRIC TOLERANCES I.A.W. ANSI Y14.5M-1992 | MATERIAL: ALLOY STEEL HEAT TREAT: NONE FINISH: NONE | DRAWN: JP 11APR13 CHECKED: RNK 11APR13 ENG APPR: RNK 11APR13 MFG APPR: [] D/A: [] COMMENTS: | Belden Incorporated www.beldenuniversal.com TITLE: ASSEMBLY, NEEDLE BEARING UNIVERSAL JOINT SIZE: C DWG. NO.: UJ-NB2000x1000 SCALE: 1:1 WT (Lbs): 2.97 SHEET 1 OF 2 |