





APPROVED

REVISIONS		ZONE	REV.	DESCRIPTION	DATE	APPROVED

INFORMATION IN THIS DRAWING
PROVIDED FOR REFERENCE ONLY

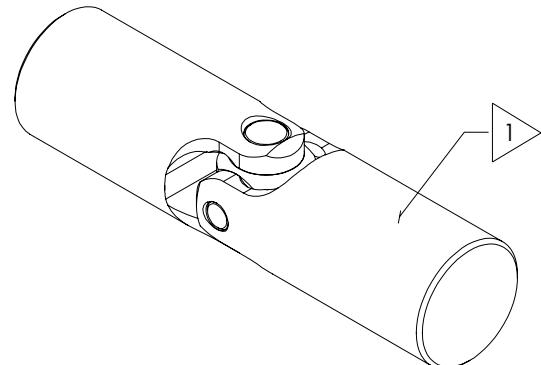

SCALE 1.5 : 1

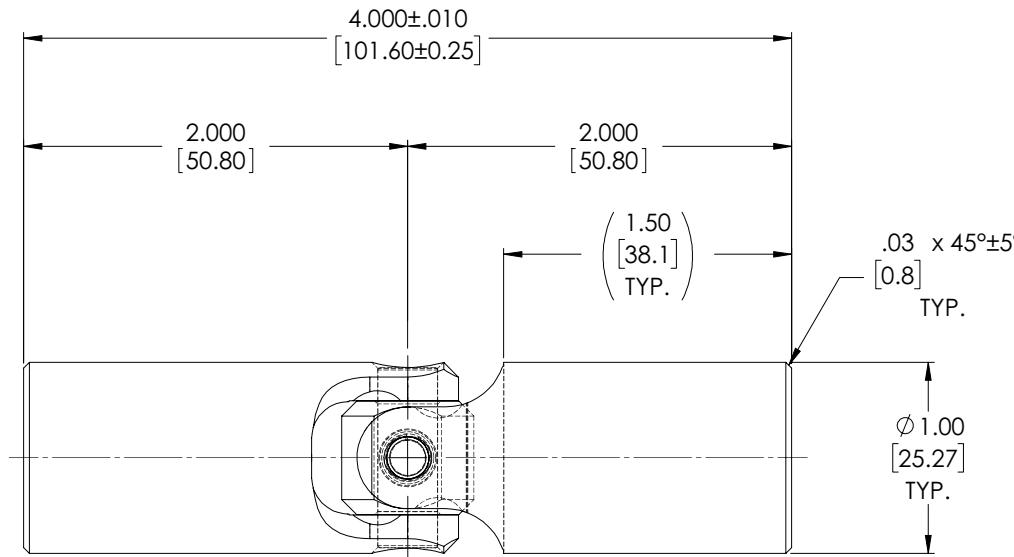

NOTE(s), UNLESS OTHERWISE SPECIFIED.

► MARK ASSEMBLY w/ "BELDEN" LOGO, PART NUMBER, REVISION LEVEL (IF ANY), DATE OF MANUFACTURE & BELDEN JOB No.

- (A) (2) LUBRICATE w/ LUBRIPLATE 1200-2, NLGI GRADE 2, AW/EP LITHIUM GREASE OR EQUIVALENT.
- (A) (3) REF., MATERIAL: YOKES... TYPE 316/316L STAINLESS STEEL, BLOCK & PINS... TYPE 316/316L STAINLESS STEEL, RETAINING RING... TYPE 316 STAINLESS STEEL, PASSIVATED.

UNLESS OTHERWISE SPECIFIED CHAMFER ALL HOLES BREAK ALL SHARP CORNERS DE-BURR ALL FEATURES		STANDARD TOLERANCES UNLESS OTHERWISE SPECIFIED	MATERIAL STAINLESS STEEL	INITIALS	DATE	Belden Universal www.beldenuniversal.com
DIMENSIONS ARE IN INCHES [mm]				DRAWN RNK	06MAR08	
FRACTIONAL: ANGULAR MACHINED: $\pm 0^\circ$ TWO PLACE DECIMAL: $\pm 010^\circ$ THREE PLACE DECIMAL: $\pm .005^\circ$ FOUR PLACE DECIMAL: $\pm .0005^\circ$	TURNED SURFACES: ✓ MILLED SURFACES: ✓	HEAT TREAT NONE	CHECKED RNK	06MAR08	TITLE:	ASSEMBLY, UNIVERSAL JOINT, STAINLESS STEEL
CONCENTRICITY: $.0025^\circ$			ENG APPR. RNK	06MAR08		
ALL HOLES TO BE LOCATED ON CENTERLINE ($\frac{1}{2}$) WITHIN .005" T.I.R.			MFG APPR.			
INTERPRET GEOMETRIC TOLERANCES I.A.W. ASME Y14.5			QC APPR.			
FINISH NONE			COMMENTS:			
SIZE DWG. NO. A UJ-SS1000-316	REV A					
SCALE: 2:1	WT (Lbs): 0.814					SHEET 1 OF 2