

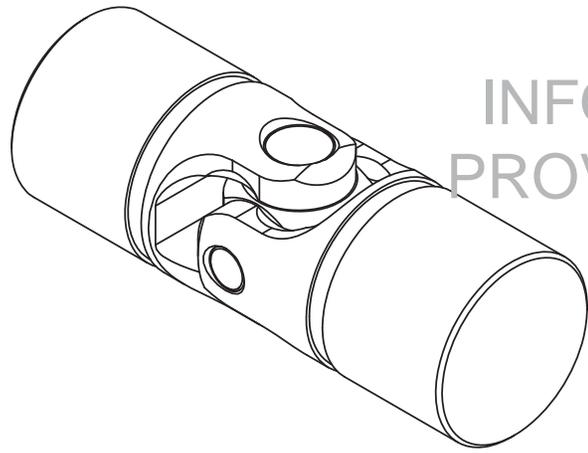
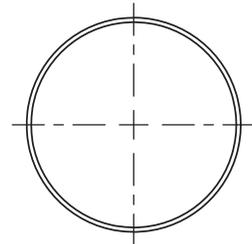


INFORMATION IN THIS DRAWING
PROVIDED FOR REFERENCE ONLY



REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED

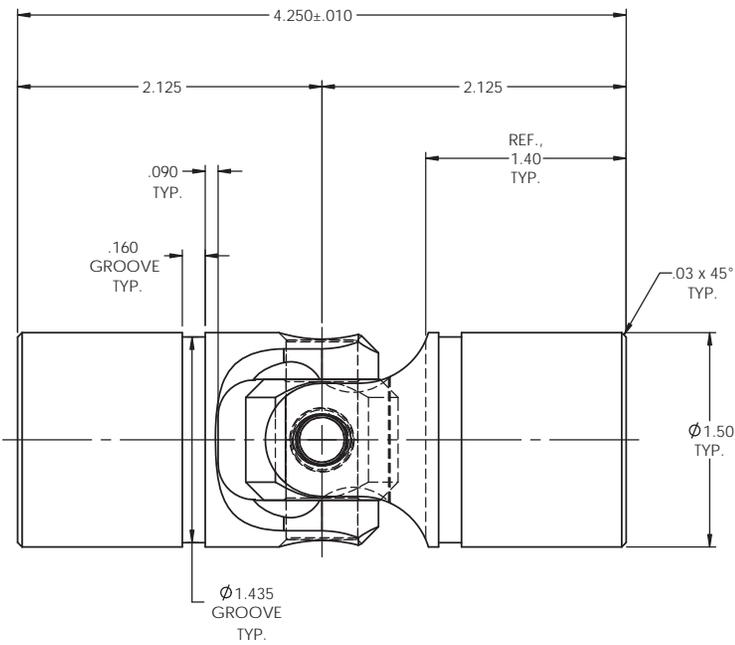

NOTE(S), UNLESS OTHERWISE SPECIFIED.

- (1) UNIVERSAL JOINT IS MARKED w/ "BELDEN" LOGO, PART NUMBER / DRAWING NUMBER, REVISION LEVEL (IF ANY), DATE OF MANUFACTURE (MO/YR), AND BELDEN JOB NUMBER.
- (2) UNIVERSAL JOINT IS LUBRICATED w/ LUBRIPLATE 1200-2, NLGI GRADE 2, AW/EP, LITHIUM GREASE OR EQUIVALENT.
- (3) UNIVERSAL JOINT IS CAPABLE OF OPERATING AT ANY ANGLE UP TO AND INCLUDING 45°.
- (4) UNIVERSAL JOINT HAS STANDARD GROOVES TO ACCEPT INSTALLATION OF PROTECTIVE COVER (BOOT). BOOT AVAILABLE SEPARATELY. REFER TO BELDEN CATALOG, WEBSITE, OR CONTACT BELDEN SALES.
- (5) REFER TO BELDEN CATALOG, WEBSITE, OR CONTACT BELDEN SALES FOR TORQUE CAPACITY.
- (6) THIS DRAWING REPRESENTS A STANDARD BELDEN ITEM. CUSTOM UNIVERSAL JOINTS ARE AVAILABLE UPON REQUEST. PLEASE CONTACT BELDEN SALES.

BELDEN PART NUMBER: UJ-SS1500x00


DO NOT SCALE DRAWING

<small>UNLESS OTHERWISE SPECIFIED CHAMFER ALL HOLES BREAK ALL SHARP CORNERS DE-BURR ALL FEATURES</small>	<small>STANDARD TOLERANCES, UNLESS OTHERWISE SPECIFIED</small> <small>DIMENSIONS ARE IN INCHES [mm]</small> ANGULAR MACHINED: ±1.0° FRACTIONAL: ±.015" TWO PLACE DECIMAL: ±.010" THREE PLACE DECIMAL: ±.005" FOUR PLACE DECIMAL: ±.0005" CONCENTRICITY: .0025" T.I.R.	MATERIAL	NAME	DATE	Belden Incorporated www.beldenuniversal.com
		STAINLESS STEEL	RNK	25AUG09	
<small>TURNED SURFACES: $\sqrt{.63}$ MILLED SURFACES: $\sqrt{.125}$</small>	<small>HEAT TREAT</small> SEE DETAIL DRAWINGS	CHECKED	RNK	25AUG09	TITLE: ASSEMBLY, UNIVERSAL JOINT
<small>PROPRIETARY AND CONFIDENTIAL</small> <small>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BELDEN INCORPORATED. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BELDEN INCORPORATED IS PROHIBITED.</small>		ENG APPR.	RNK	25AUG09	
<small>ALL HOLES TO BE LOCATED ON CENTERLINE (C) WITHIN .005" T.I.R.</small> <small>INTERPRET GEOMETRIC TOLERANCES I.A.W. ANSI Y14.5M-1992</small>	FINISH	NONE	COMMENTS:		SIZE C
DWG. NO. UJ-SS1500x00					REV
SCALE: 3:2 WT (Lbs): 1.878 SHEET 1 OF 2					

BOM Table			
ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	SSY1500LHx00	YOKE, LARGE HOLE	1
2	SS1500-2A	BLOCK	1
3	SS1500-3A	SMALL PIN	1
4	SS1500-5A	LARGE PIN	1
5	SS1500-6A	RETAINING RING, STAINLESS STEEL	1
6	SSY1500SHx00	YOKE, SMALL HOLE	1

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
-	-	See Sheet1	-	-

INFORMATION IN THIS DRAWING
PROVIDED FOR REFERENCE ONLY

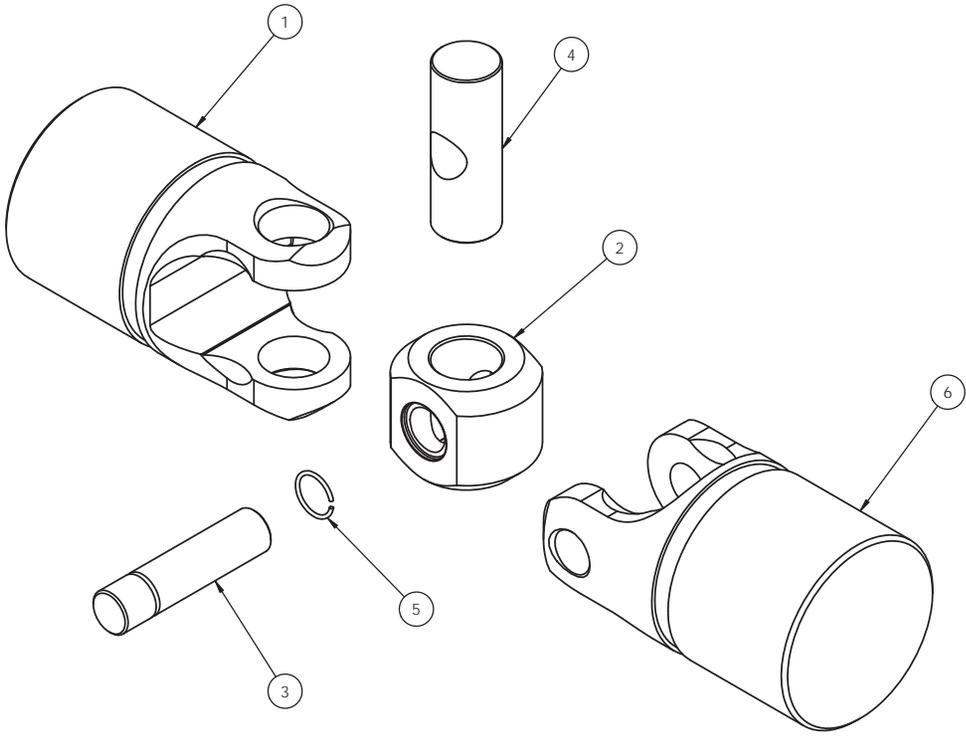

DO NOT SCALE DRAWING

UNLESS OTHERWISE SPECIFIED CHAMFER ALL HOLES BREAK ALL SHARP CORNERS DE-BURR ALL FEATURES TURNED SURFACES: $\sqrt{63}$ MILLED SURFACES: $\sqrt{125}$ PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BELDEN INCORPORATED. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BELDEN INCORPORATED IS PROHIBITED.	STANDARD TOLERANCES, UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES (mm)	MATERIAL STAINLESS STEEL HEAT TREAT SEE DETAIL DRAWINGS FINISH NONE	<table border="1"> <tr> <th>NAME</th> <th>DATE</th> </tr> <tr> <td>RNK</td> <td>25AUG09</td> </tr> <tr> <th>CHECKED</th> <th>DATE</th> </tr> <tr> <td>RNK</td> <td>25AUG09</td> </tr> <tr> <th>ENG APPR.</th> <th>DATE</th> </tr> <tr> <td>RNK</td> <td>25AUG09</td> </tr> <tr> <th>MFG APPR.</th> <th>DATE</th> </tr> <tr> <td></td> <td></td> </tr> <tr> <th colspan="2">COMMENTS</th> </tr> <tr> <td colspan="2"></td> </tr> </table>	NAME	DATE	RNK	25AUG09	CHECKED	DATE	RNK	25AUG09	ENG APPR.	DATE	RNK	25AUG09	MFG APPR.	DATE			COMMENTS				Belden Incorporated www.beldenuniversal.com TITLE: ASSEMBLY, UNIVERSAL JOINT
	NAME	DATE																						
	RNK	25AUG09																						
	CHECKED	DATE																						
RNK	25AUG09																							
ENG APPR.	DATE																							
RNK	25AUG09																							
MFG APPR.	DATE																							
COMMENTS																								
ALL HOLES TO BE LOCATED ON CENTERLINE (C) WITHIN .005" T.I.R. INTERPRET GEOMETRIC TOLERANCES I.A.W. ANSI Y14.5M-1992	<table border="1"> <tr> <th>SIZE</th> <th>DWG. NO.</th> <th>REV</th> </tr> <tr> <td>C</td> <td>UJ-SS1500x00</td> <td></td> </tr> </table>	SIZE	DWG. NO.	REV	C	UJ-SS1500x00		SCALE: 3:2 WT (Lbs): 1.878 SHEET 2 OF 2																
SIZE	DWG. NO.	REV																						
C	UJ-SS1500x00																							